

- [PRODUCTS](#) [NEWS](#) [COMPANY PROFILE](#) [CONTACT US](#) [SITE MAP](#)
[WINCHES](#) [POWER DRIVES](#) [MOUNT SYSTEMS](#) [PREMIUM HUBS](#) [ACCESSORIES](#)
[ATVS](#) [SUPERMOUNT](#) [JEEP](#)



POWER WHEN YOU NEED IT, WHERE YOU

[HOME](#)

H8P/H10P
 8,000 –10,000 lb./
 3,630–4,540 kg

Additional winch part numbers are listed in the [master product guide](#).



All AC Winches

- [AC1000](#)
- [AC1500](#)
- [AC2000](#)
- [AC3000](#)
- [SAC1000](#)

All DC Winches

- [EP12.5](#)
- [EP16.5](#)
- [Husky 8](#)
- [Husky 10](#)
- [EP6.0](#)
- [EP9.0](#)
- [EPi6.0](#)
- [EPi9.0](#)
- [X6CD](#)
- [X9](#)
- [S6000](#)
- [S9000](#)
- [S3000](#)
- [S4000](#)
- [S5000](#)
- [ATV1800](#)
- [ATV2300](#)
- [ATV3000](#)
- [GP1800](#)
- [GP2300](#)
- [GP3000](#)
- [EX1](#)
- [X1](#)
- [X1F](#)
- [X2](#)
- [X2F](#)
- [T1500](#)
- [T2000](#)
- [C1000](#)

Hydraulic Winches

- [H9W](#)
- [H10/H12/H14](#)
- [H8/10P](#)
- [H11/13/15P](#)
- [H20/25/30P](#)

Power Drives

Standard Features

- Proven robust construction engineered to meet J706 standards
- High efficiency 2 stage planetary gearbox giving optimum reliability
- Integral, automatic, fail safe brake
- Rugged, high torque motor unit of proven reliability
- Spring engaged, manual freespooling, released for rapid rope payout, pneumatic option also available, adjustable Freespool Damper
- Heavy duty fabricated steel mounted on maintenance-free plain bearings

Performance

H8P	
Maximum Oil Pressure	1,800 psi
Maximum Oil Flow	15gpm (57 l/min.)
Line Pull (Second Layer)	6,658 lbs. (3,020kg)
Line Pull (Third Layer)	5,710 lbs. (2,590kg)
Line Pull (Fourth Layer)	4,892 lbs. (2,260kg)
H10P	
Maximum Oil Pressure	1,700 psi
Maximum Oil Flow	15gpm (57 l/min.)
Line Pull (Second Layer)	8,200 lbs. (3,720kg)
Line Pull (Third Layer)	6,970 lbs. (3,160kg)
Line Pull (Fourth Layer)	6,040 lbs. (2,740kg)

Specifications

H8P	
Rated Line Pull (Bottom Layer)	8,000 lb. (3,630 kg)
Line Speed, Bottom Layer, No Load	40'/min. (12.19m/min.)
Recommended Wire Rope Diameter	3/8" (10mm)
Short Drum Wire Rope Length	100' (30m)
Long Drum Wire Rope Length	130' (40m)
Drum Diameter	3.5" (89mm)
Weight (Excluding Wire Rope)	84 lbs. (38/40 kg)
H10P	
Rated Line Pull (Bottom Layer)	10,000 lb. (4,540 kg)
Line Speed, Bottom Layer, No Load	30'/min. (9.14m/min.)
Recommended Wire Rope Diameter	7/16" (11mm)
Short Drum Wire Rope Length	75' (23m)
Long Drum Wire Rope Length	100' (30m)
Drum Diameter	3.5" (89mm)

[AC](#)
[DC](#)

Weight (Excluding Wire Rope)

84 lbs. (38 kg)


Winch

H8P Winch only (Short Drum)	5050A
H8P Winch only (Long Drum)	5060A
H10P Winch only (Short Drum)	5170A
H10P Winch only (Long Drum)	5178A

Optional Accessories


Roller Fairlead (Short Drum)	5600
Roller Fairlead (Long Drum)	5610A
Cable Tensioner(Short Drum)	5606
Cable Tensioner (Long Drum)	5607
Flat-Bed Mount Plate	5625
Pneumatic Freespool	5603
Pulley Block, 20,000 lb. (9,100kg)	7750A

Dimensions



ALL HOLES
M10 THREAD

commended Accesso

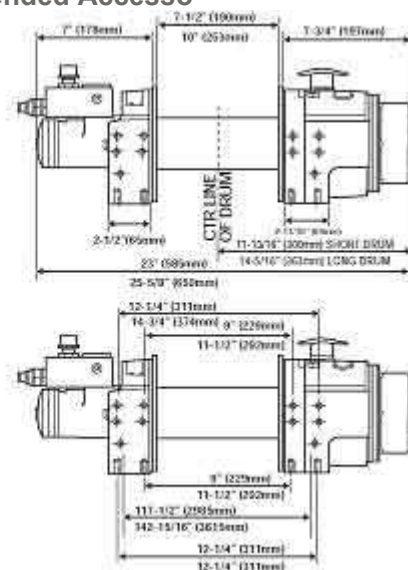

[Home](#) | [Winches](#) | [Power Drives](#) | [Mounts for ATVs](#) | [Mounts for Vehicles](#) | [Jeeps](#) | [Hubs](#) | [Accessories](#) | [News](#) | [Company Profile](#) | [Contact Us](#) | [Site Map](#)

© Copyright 2006 Superwinch, Inc. All Rights Reserved.